


POWER SUPPLY



DATA SHEET # SL-TL-13


GENERAL SPECIFICATION

TYPE	: 1. FEED LOW CURRENT (PS-30) : 2. FIVE OUTPUT (PS-40) : 3. SMPS SUPPLY (PS-50/60)	FUSE RATING	: AS PER CURRENT RATING.
LOAD REGULATION	: BETTER THAN 1%.	OPERATING AMBIENT	
LINE REGULATION	: BETTER THAN 1%.	- TEMPERATURE	: 0-60°C.
RIPPLE	: LESS THAN 1% PEAK TO PEAK.	- HUMIDITY	: 5-95% RH.
PROTECTION	: SHORT CIRCUIT & OVER LOAD.	HOUSING	: Ex-ALUMINUM FOR MODEL NO. PS-30, 40, 50.
CURRENT LIMITING	: CONSTANT CURRENT OR FOLD BACK TYPE.		SHEET METAL FOR MODEL NO. PS-60, 70
INDICATION	: LED FOR HEALTHY OUTPUT.	TERMINAL	: MODEL NO. PS-30, 40 SUITABLE FOR CONDUCTOR UPTO 1.5 Sq. mm.
STABILITY	: 0.2% + 30 mV. (AFTER 1.2 Hr. WARM UP)		MODEL NO. PS-50, 60, 70 SUITABLE FOR CONDUCTOR UPTO 2.5 Sq. mm.

MODEL & ORDERING INFORMATION

DESCRIPTION/ MODEL NO.	PS - 30	PS - 40	PS - 50	PS - 60
INPUT	110 OR 220 VAC	110 OR 220 VAC	90-264 VAC (SMPS)	90-264 VAC (5AmP) 180 - 250 VAC (10 A)
OUTPUT	5, 12, 15, 24 VDC (ANY ONE)	24 VDC FIVE OUTPUT	5, 12, 15, 24 VDC (ANY ONE)	5, 12, 15, 24 VDC (ANY ONE)
BURDEN	UPTO 25 mA	< 30 mA each	UPTO 2 Amp.	UPTO 10 Amp.
SIZE	48 X 96 X 150 mm (W) (H) (D)	96 X 96 X 107 mm (H) (W) (D)	96 X 96 X 132 mm (H) (W) (D)	120 X 235 X 132 mm (H) (W) (D)

ISOMETRIC VIEW

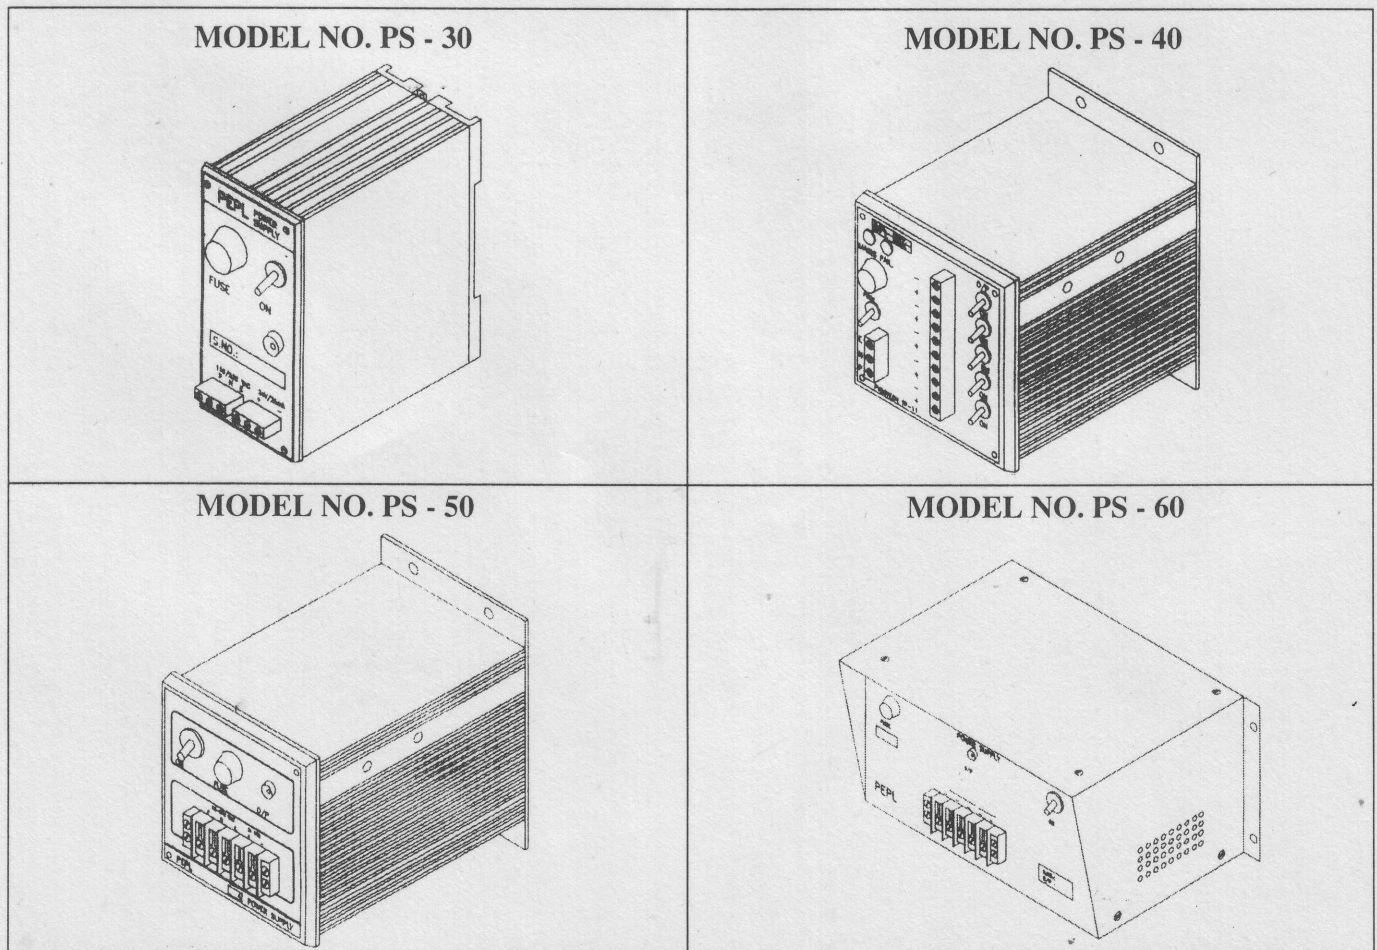

Specification are subject to change without prior notice.
WKTG/DKD/VENTURA/PS6.CHP

REV. 00. : 06.05.99